



OFFICIAL UK DISTRIBUTORS FOR:



DRM Technic

Suppliers of Gas Analysis Equipment



TS-10 PRE-COOLER

The TS-10 Pre-Cooler lowers the dew-point of sample gas, keeping it stable to ensure that your system produces the most accurate measurements possible.



FEATURES

Low-maintenance | Easy to install | Integrated Condensate Pump


SPECIFICATIONS

Product No.	TS-10 Pre-Cooler
General	
Ambient Temperature	0 ... 45 °C
Power Supply	115V 50/60 Hz or 230V 50/60Hz
Power Consumption	33W
Protection Class	IP 20
Installation	Against Wall
Heat Exchanger	
Gas Pressure p_{max}	1 bar
Sample Gas Connections	G 3/8
Condensate Outlet Connection	DN 6

TECHNICAL DRAWINGS

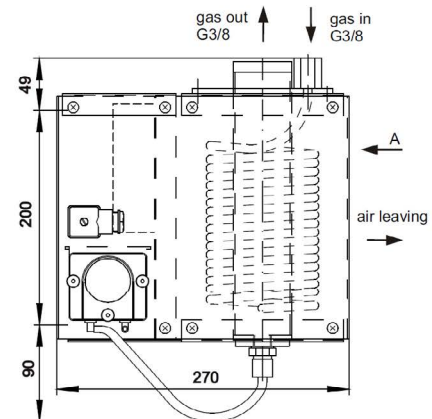

view A (only cover)



OPTIONS AND ACCESSORIES

Product No.	Description
AK 20 V	Pre-Cooler with automatic drain valve (PVDF)
11 LD spec	Pre-Cooler with automatic drain valve (SS)
165 SS / 167 T	Pre-Cooler with combined centrifugal separator and coarse filter
161 PVDF spec	PVDF Scrubber
170 IST	SS Chiller

CONTACT US: DRM Technic, 4 Cherry Orchard, Newcastle-under-Lyme, Staffordshire, UK, ST5 2UB

Tel: +44 (0) 1782 638491 | Email: sales@drmtechnic.com | Web: www.drmtechnic.com

DRM/TS10/
240316/001

DRM/TS10/
240316/001