



OFFICIAL UK DISTRIBUTORS FOR:



DRM Technic

Suppliers of Gas Analysis Equipment

**BÜNOx 2+
Gas Converter**


BÜNOx 2+ GAS CONVERTER

The BUNOX series Gas Converters allow easy detection of NOx components in flue gas (NO and NO₂).

The BUNOX 2+ is an updated replacement for the current BUNOX. Because they share the same dimensions and connections, they can be replaced one-to-one.



- ### FEATURES
- 19" Mount Housing
 - Maintenance Calculator NOxCal for Service Life Monitoring
 - Optimised Menu Navigation
 - Easy to Replace Reactor Cartridge (Tools Not Needed)
 - High Conversion Rate: > 97%
 - High NO₂ Capacity
 - Low Temperature Operation for High Efficiency
 - Optional Bypass Solenoid Valves
 - Optional Long-Life Cartridges

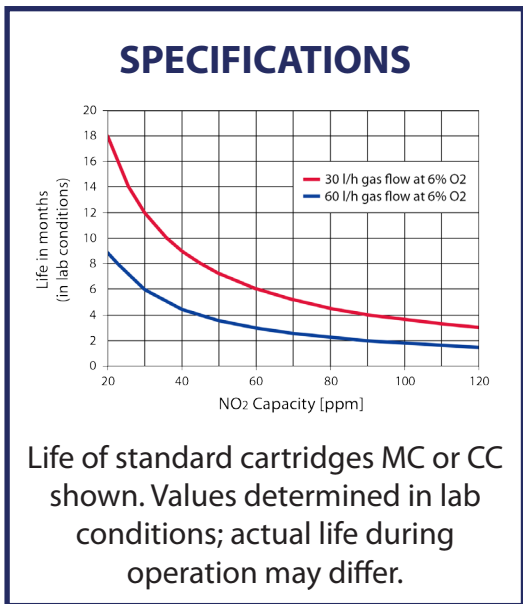

SPECIFICATIONS

Product No.	BÜNOx 2+
General	
Operating Temp.	400 °C
Ready for Operation	After approx. 30 min heat-up time
Power Supply	115 V AC or 230 V AC; 50/60 Hz
Cartridge Material	Metal (MC) and Carbon (CC) Based
Gas Inlet Conditions	
Sample Gas Pressure	Up to 1.5 bar abs.
Sample Gas Flow Rate	Up to 120 L/h (2 L/min)
Sample Gas Temp.	5 °C to 80 °C
Dew Point after Cooler	< 10 °C
Ambient Conditions	
Ambient Temp.	5 °C to 50 °C (during operation) -20 °C to 70 °C (during storage)
Ambient Humidity (during storage)	< 80% rel. humidity
Signal Inputs and Outputs	
Status Outputs (Service/NOxCal; Operating Mode; Temperature)	Changeover contact max. 230 V AC / DC, 1 A
Analogue Output	Temperature 4-20 mA
Signal Input	Solenoid Valve Control, 24 V DC, 1 mA via external switch
Structural Specifications	
Dimensions (w x h x d)	483 mm x 133 mm x 285 mm
Weight	10.2 kg (approx.)
Protection Class	IP20

CONTACT US: DRM Technic, 4 Cherry Orchard, Newcastle-under-Lyme, Staffordshire, UK, ST5 2UB

DRM/BNx2/
220217/005

Tel: +44 (0) 1782 638491 | Email: sales@drmtechnic.com | Web: www.drmtechnic.com

DRM/BNx2/
220217/005



OFFICIAL UK DISTRIBUTORS FOR:





DRM Technic

Suppliers of Gas Analysis Equipment

**BÜNOx 2+
Gas Converter**

BUNOx 2+ TECHNICAL DRAWINGS

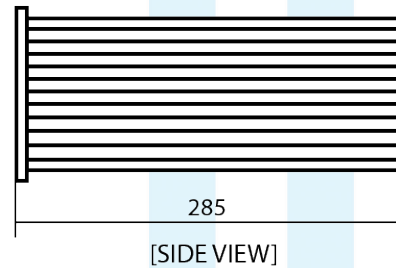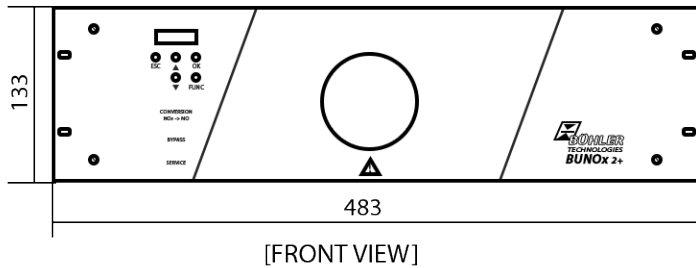

All measurements in mm

BUNOx 2+ REACTOR CARTRIDGE SPECIFICATIONS

Part No.	MC	CC
Filling Material	Metal-Based	Carbon-Based
Life	See Diagram on Previous Page	See Diagram on Previous Page
Conversion Factor NO ₂ --> NO	≥ 97% when cartridge is new	≥ 95% when cartridge is new
Max. NO ₂ Capacity (at 70 l/h)	300 ppm	120 ppm
Max. Conversion Temp.	425 °C	225 °C

¹ The converter temperature should only be increased if the conversion level drops below 95 % with the cartridge almost depleted

BUNOx 2+ OPTIONS AND ACCESSORIES

Item No.	Description
553 119 70	MC Cartridge (Metal Based Material; Long-Life Version)
553 199 90	MC Cartridge (Metal Based Material)
553 199 60	CC Cartridge (Carbon Based Material; Long-Life Version)
553 199 80	CC Cartridge (Carbon Based Material)
553 199 992	Set of Gaskets

CONTACT US: DRM Technic, 4 Cherry Orchard, Newcastle-under-Lyme, Staffordshire, UK, ST5 2UB