




OFFICIAL UK DISTRIBUTORS FOR:

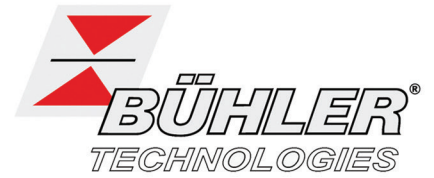


DRM Technic

Suppliers of Gas Analysis Equipment

DVx-SG STAINLESS GLASS (DURAN) DRAIN VESSELS

DVx-SG Stainless Glass Drain Vessels are specified to increase the housing capacity in coalescing applications where an automatic float drain cannot be used.

The housings are free from welds, comply with NACE MR-01-75 and conform to SEP of PED 97/23/EC. They can be supplied in a wide range of exotic materials such as Hastelloy, Monel, Titanium and more.

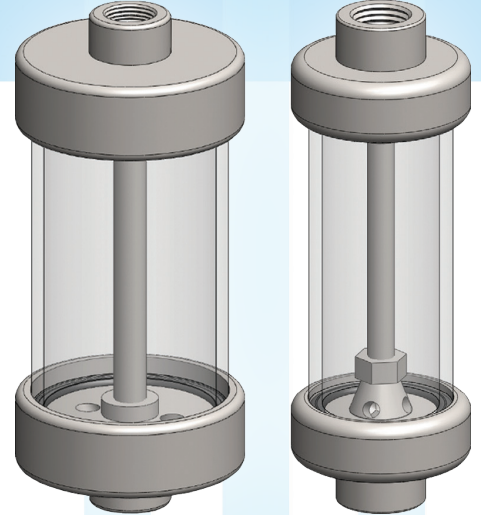

FEATURES

Materials: 316L Stainless Steel and Pyrex Glass | Ports: 1/4" NPT (F) | Pressure: 7 Bar | Temperature: 100 °C

SPECIFICATIONS

Product Number	DV1-SG	DV2-SG	DV3-SG
General			
Port Size	1/4" NPT (F)	1/4" NPT (F)	1/4" NPT (F)
Drain	1/4" NPT (F)	1/4" NPT (F)	1/4" NPT (F)
Max. Pressure	7 Bar	7 Bar	7 Bar
Max. Temperature	100 °C	100 °C	100 °C
Materials of Construction¹			
Head & Internals	316L SS	316L SS	316L SS
Bowl	Pyrex	Pyrex	Pyrex
Seals	Viton	Viton	Viton
Principal Dimensions²			
Diameter	40 mm	40 mm	56 mm
Height	114 mm	114 mm	239 mm
Volume	35 cc	105 cc	255 cc
Weight	0.35 kg	0.65 kg	0.9 kg
Accessories			
Bowl Guard	SMB	LMB	LMB
Fittings Kit	LFK	LFK	LFK

PARTS LIST

Drain Vessel	DVx-SG ³
Bowl Guard	xMB ³
Fittings Kit	LFK

FOOTNOTES

- ¹ Material abbreviations:
- 316L SS: 316L Stainless Steel
- ² All measurements are accurate to the nearest whole number
- ³ Replace the "x" with the required number/letter

For more information, please contact our sales department (contact details below)

CONTACT US: DRM Technic, 4 Cherry Orchard, Newcastle-under-Lyme, Staffordshire, UK, ST5 2UB

Tel: +44 (0) 1782 638491 | Email: sales@drmtechnic.com | Web: www.drmtechnic.com

DRM/DVxSG/
12115/002

DRM/DVxSG/
12115/002